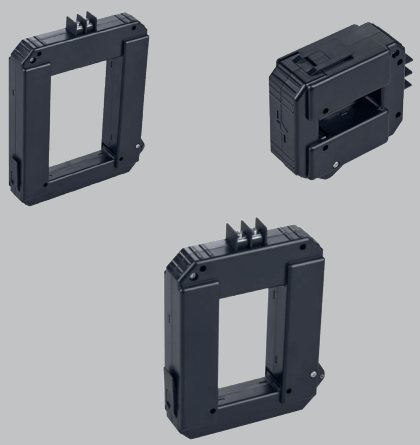


Doc. no. 2.204.048.1.d 10/2026

Split Core
Low Power Current Transformer


CT-BSC-021
CT-BSC-050
CT-BSC-080


Data sheet

Janitza electronics GmbH
Vor dem Polstück 6
35633 Lahnau | Germany
Support +49 6441 9642-22
info@janitza.com | www.janitza.com


Janitza

Type	Primary current
CT-BSC-021-000-600	600 A

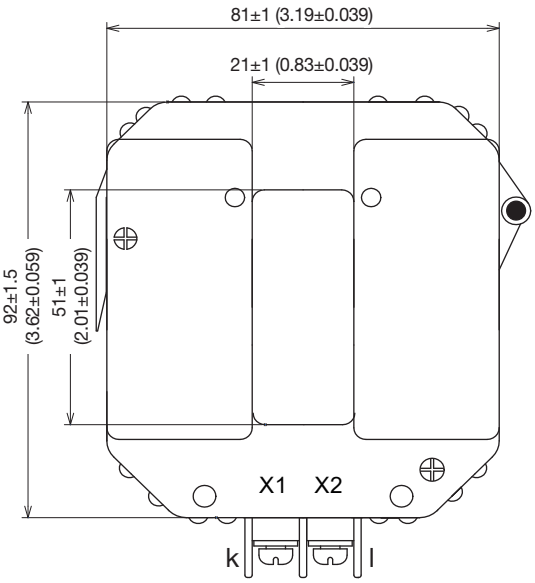

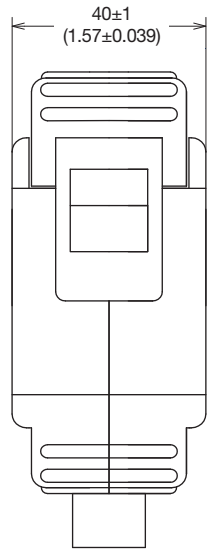



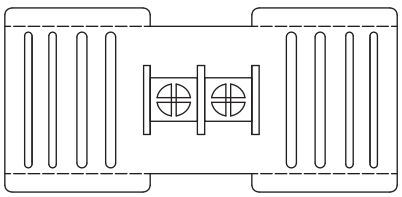


all dimensions in mm (in)

Specifications	Data
Phase error at nominal current	≤0.5°
Weight appr.	475 g (1.05 lb)
Output signal	333 mV
Short time thermal current for 1 sec	40 kA
Overload capacity	120 %
Connection	M4 Screw connection
Accuracy class	0.5
Frequency	50 .. 60 Hz
Insulation voltage	4.0 kV/1 mA/1 min
Operating temperature	-40 .. 65 °C (-40 .. 149 °F)
Storage temperature	-45 .. 85 °C (-49 .. 185 °F)
Standards	ANSI C57.13, IEC61869-2, RoHS compliant
Case	Rigid housing case with UL 94 V-0 durable plastic
Insulation resistance	DC 500 V/100 MΩ min
Carry out primary conductor	21 x 51 mm (0.827 x 2.01 in)
Cable tie mounting	No

Type	Primary current
CT-BSC-050-000-1200	1200 A



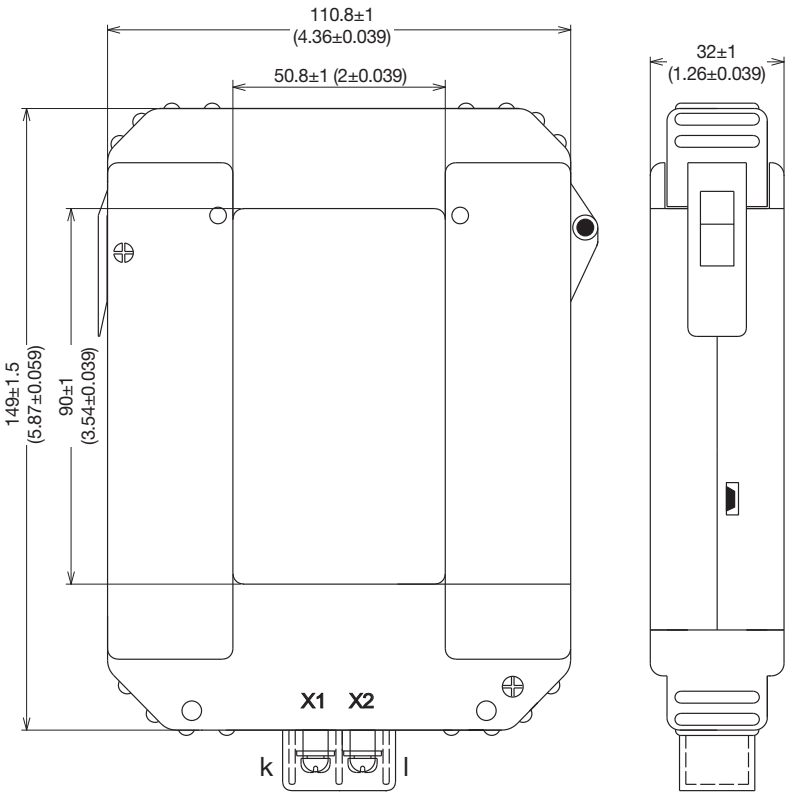


all dimensions in mm (in)

Specifications	Data
Phase error at nominal current	≤0.5˚
Weight appr.	770 g (1.70 lb)
Output signal	333 mV
Short time thermal current for 1 sec	40 kA
Overload capacity	120 %
Connection	M4 Screw connection
Accuracy class	0.5
Frequency	50 .. 60 Hz
Insulation voltage	4.0 kV/1 mA/1 min
Operating temperature	-40 .. 30 °C (-40 .. 86 °F)
Storage temperature	-45 .. 90 °C (-49 .. 194 °F)
Standards	ANSI C57.13, IEC61869-2, RoHS compliant
Case	Rigid housing case with UL 94 V-0 durable plastic
Insulation resistance	DC 500 V/100 MΩ min
Carry out primary conductor	50.8 x 90 mm (2 x 3.54 in)
Cable tie mounting	No

Type	Primary current
CT-BSC-080-000-2500	2500 A



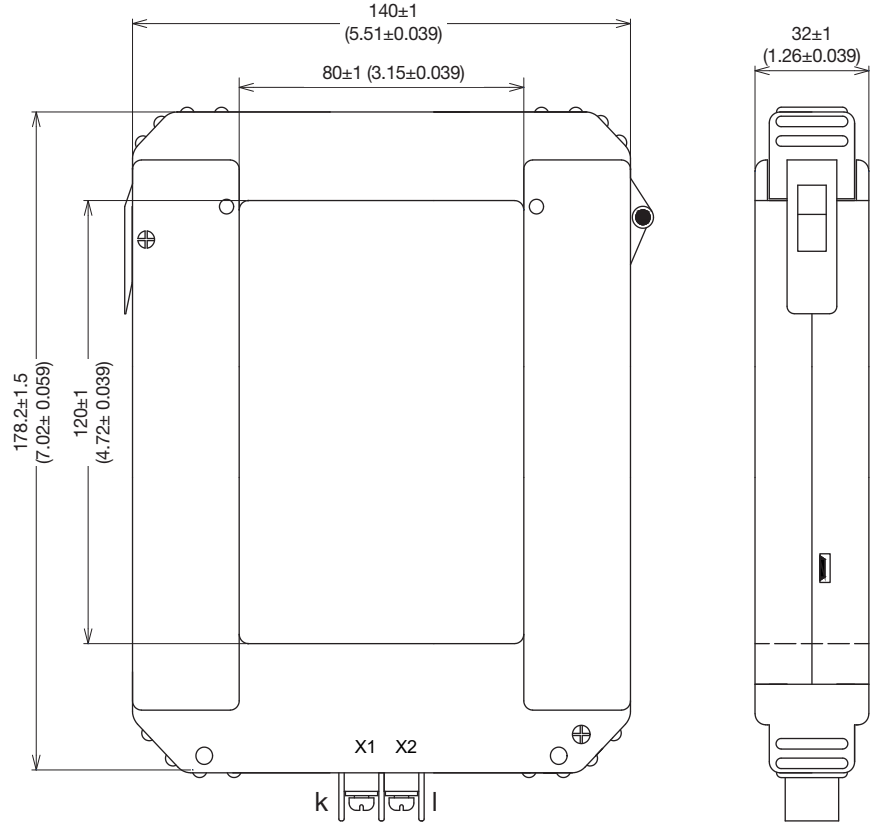


all dimensions in mm (in)

Specifications	Data
Phase error at nominal current	≤0.5˚
Weight appr.	1090 g (12.4 lb)
Output signal	333 mV
Short time thermal current for 1 sec	40 kA
Overload capacity	120 %
Connection	M4 Screw connection
Accuracy class	0.5
Frequency	50 .. 60 Hz
Insulation voltage	4.0 kV/1 mA/1 min
Operating temperature	-40 .. 30 °C (-40 .. 86 °F)
Storage temperature	-45 .. 90 °C (-49 .. 194 °F)
Standards	ANSI C57.13, IEC61869-2, RoHS compliant
Case	Rigid housing case with UL 94 V-0 durable plastic
Insulation resistance	DC 500 V/100 MΩ min
Carry out primary conductor	80 x 120 mm (3.15 x 4.72 in)
Cable tie mounting	No

OVERVIEW & ART.NO.

Type	Art. no.	Primary current	Carry out primary conductor mm (in)	Cable length m (in)	Accuracy class
CT-BSC-021-000-600	1503347	600 A	21 x 51 (0.826 x 2.00)	M4 Screw connection	0.5
CT-BSC-050-000-1200	1503348	1200 A	50.8 x 90 (2,00 x 3.54)	M4 Screw connection	0.5
CT-BSC-080-000-2500	1503349	2500 A	80 x 120 (3.15 x 4.72	M4 Screw connection	0.5

CONNECTION

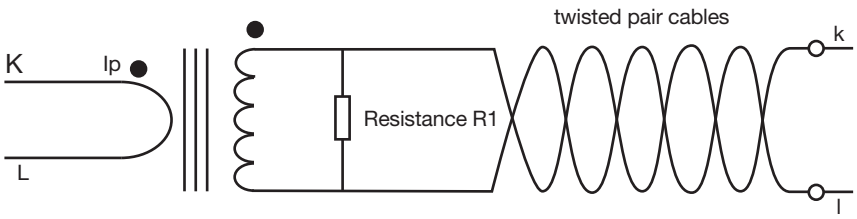

$$V = \frac{I \times R}{T_e}$$

$$V_L = V_{max} - \left[\frac{I \times DCR}{T_e} \right]$$

Janitza

Janitza electronics GmbH
Vor dem Polstück 6 | 35633 Lahnau
Germany

Tel. +49 6441 9642-0
info@janitza.com | www.janitza.com

Doc. No. 2.204.048.1.d | 10/2026 | Subject to technical alterations.
The latest version of the document can be found in the download area at www.janitza.com.